



ITX-R194 User Manual

Issue 1.1

www.CoreIPC.com

Security Guidance

Copyright Statement

© 2026 CoreIPC. All rights reserved.

All trademarks and names mentioned in this user manual are the property of their respective registered companies.

Disclaimer

- This user manual is protected by copyright, and all content herein is the property of CoreIPC.
- CoreIPC reserves the right to modify the product specifications or related information mentioned in this user manual.
- Any modifications or changes to the product specifications or related information mentioned in this user manual will be made without prior notice.
- The contents of this user manual may not be reproduced, modified, reprinted, distributed, or published in any form without prior written permission from CoreIPC.

- To help you use the CoreIPC motherboard, please read the [User Manual] carefully.
- For product-related information, please be sure to read these safety instructions carefully.
- Identifying the Product Version
You can find the version of this motherboard labeled [Issue:X.X] on the motherboard itself. X.X represents a number; for example, a label reading [Issue1.0] indicates that the version of this motherboard is 1.0. Please note the product version when updating the motherboard's BIOS or drivers, or when referring to other technical documentation.

Basic Safety Tips

1. Before using this product, please be sure to read the product manual carefully.
2. Any cards not yet ready for installation should be stored in anti-static bags.
3. Before removing the board from the antistatic bag, place your hand on a grounded metal object for a moment (such as 10 seconds) to discharge any static electricity from your body and hands.
4. When handling circuit boards, you must wear anti-static gloves and make it a habit to touch only the edges.
5. To prevent electric shock or damage to the product, be sure to turn off the AC power before inserting, removing, or reconfiguring the board.
6. Before moving a board or the entire unit, you must first turn off the AC power.
7. For complete systems, be sure to turn off the AC power before adding or removing any boards.
8. Before connecting or disconnecting any device, you must first turn off the AC power.
9. To avoid unnecessary damage to the product caused by frequent power cycles, wait

at least 30 seconds after turning it off before turning it back on.

CoreIPC

Ordering Information

No.	Model	CPU	Cores	Freq.	Memory	HDMI	VGA	LVDS	eDP	LAN	USB	PS2	LPT	COM/ 485	POWER
1	ITX-R194 VER1.1	J1900	4	2.0G	DDR3L	/	1	/	/	4	3	1	/	1 / 0	12V

CoreIPC


1. Product Description

ITX-R194 is a CoreIPC ITX-series router motherboard supporting Intel® Bay Trail-I/M/D series processors.

The main features of the ITX-R194 motherboard are as follows:

- Integrated Intel® Celeron® J1900 2.0 GHz quad-core processor, compatible with Bay Trail-I/M/D series processors;
- Supports single-channel 1600/1333 MHz DDR3L 1.35 V memory, up to 8 GB;
- Supports VGA display output;
- Supports four Intel® I211/I210 Gigabit Ethernet ports, with two optional bypass pairs;
- Supports one Mini PCIe slot for Wi-Fi/4G and one mSATA slot;
- Supports three or four USB ports;
- Supports two RS-232 serial ports;
- Fanless cooling enables a sealed system design for improved dust and moisture resistance;
- Supports a wide operating temperature range of -20°C to 60°C;
- Supports AT/ATX power mode switching and 12 V DC power input.


2. Motherboard Block Diagram

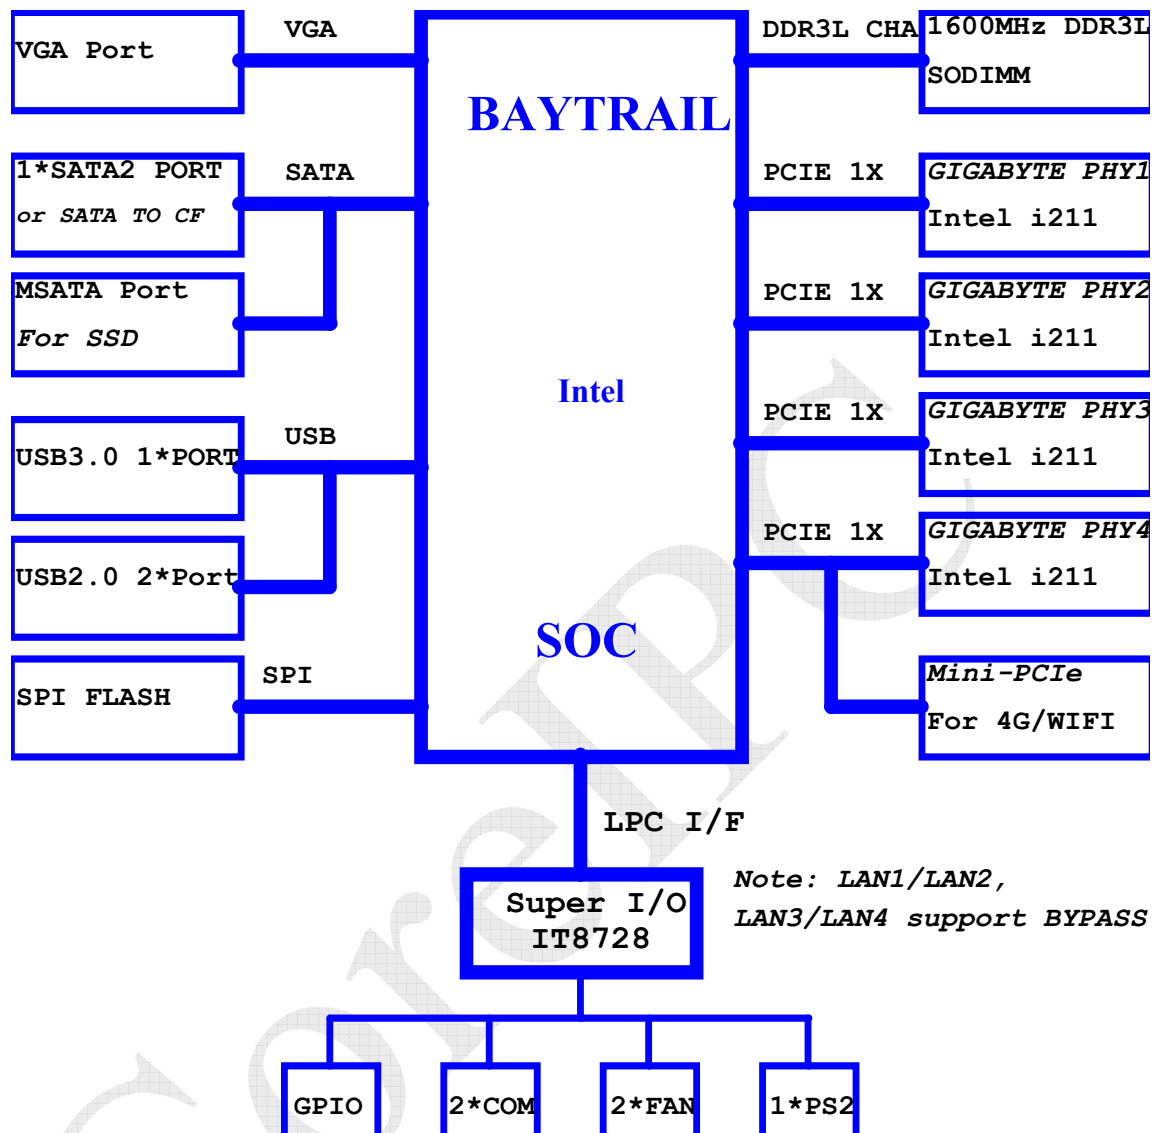


3. Motherboard Specifications

Item	Description
Processor	Integrated Intel® Celeron J1900/2.0GHz quad-core processor Compatible with Intel® Bay Trail-I/M/D series CPUs
Memory	1 × SO-DIMM slot; supports single-channel 1600/1333 MHz DDR3L 1.35 V memory, up to 8 GB
Display	Integrated Intel® HD Graphics
	1 × VGA port
LAN	4 × Intel® I211/I210 Gigabit Ethernet controllers (two optional bypass pairs); supports Wake-on-LAN and PXE boot
	1 × Mini PCIe slot supporting half-size and full-size Wi-Fi or 4G modules; when all four LAN ports are required, only 4G is supported
Storage	1 × full-size mSATA slot
	1 × SATA 2.0 port
Rear I/O	4 × RJ-45 Gigabit Ethernet ports
	2 × USB 2.0 ports
	1 × Cisco-style RS-232 serial port
	1 × power button (optional)
	1 × HDD/power LED
	1 × 12 V DC power input
Front I/O	2 × USB 2.0 ports (optional; mutually exclusive with the onboard 2 × 4-pin USB 2.0 header)
	4 × LAN LEDs
	1 × HDD/power LED
Onboard I/O	1 × CF card interface (optional)
	1 × 1 × 12-pin JVGA connector
	2 × USB 2.0 ports via a 2 × 4-pin header (only one USB port is supported by default; mutually exclusive with the front I/O USB 2.0 ports)
	1 × 1 × 6-pin PS/2 keyboard/mouse connector
	1 × 2 × 5-pin COM header
	1 × 2 × 8-pin LAN LED header
	1 × 1 × 4-pin drive power connector
	1 × 4-pin ATX power connector, usable as a 12 V power input/output connector

	1 × 2 × 5-pin front-panel switch and LED header
Fan Connectors	Fanless thermal design; one 1 × 4-pin CPU fan connector and one 1 × 4-pin system fan connector are reserved
GPIO	Supports four GPIO inputs and four GPIO outputs
BIOS	64Mb Flash ROM
Watchdog	Supports hardware reset with 256 levels (0–255 seconds)
Operating System	Windows 7/Windows 10/Linux
Power Input	12 V DC power input
Operating Temperature	60°C~ -10°C
Storage Temperature	-20°C~70°C
Operating Humidity	5%–95% relative humidity, non-condensing
Dimensions	170mm x 170mm

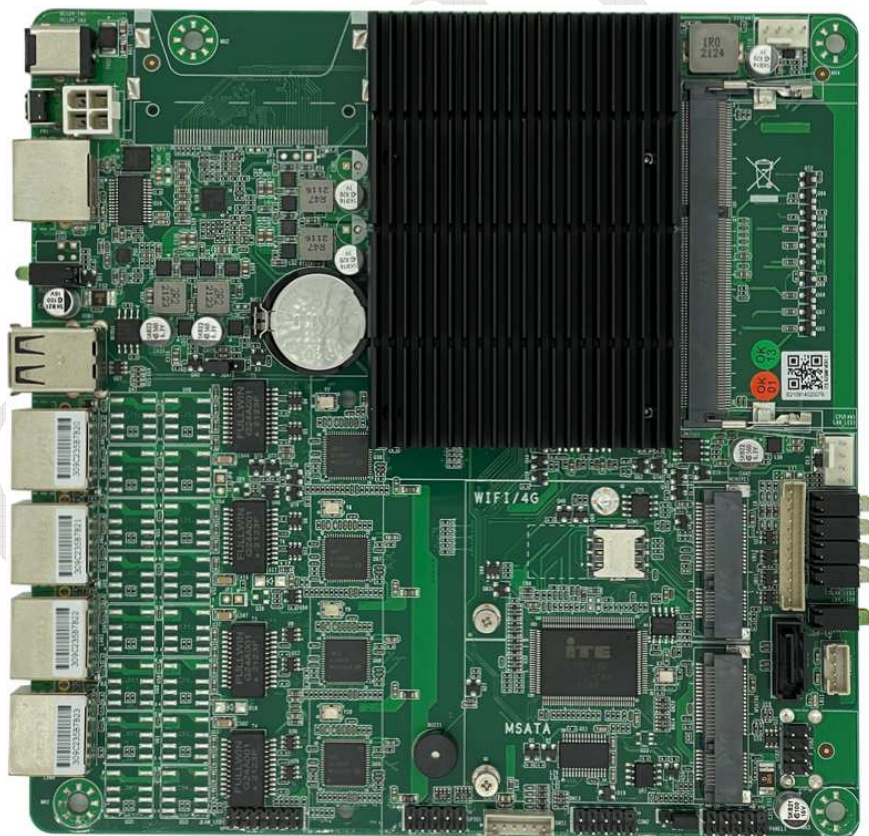

Note: The image above shows the front view of ITX-R194 VER1.1. Other models may differ.

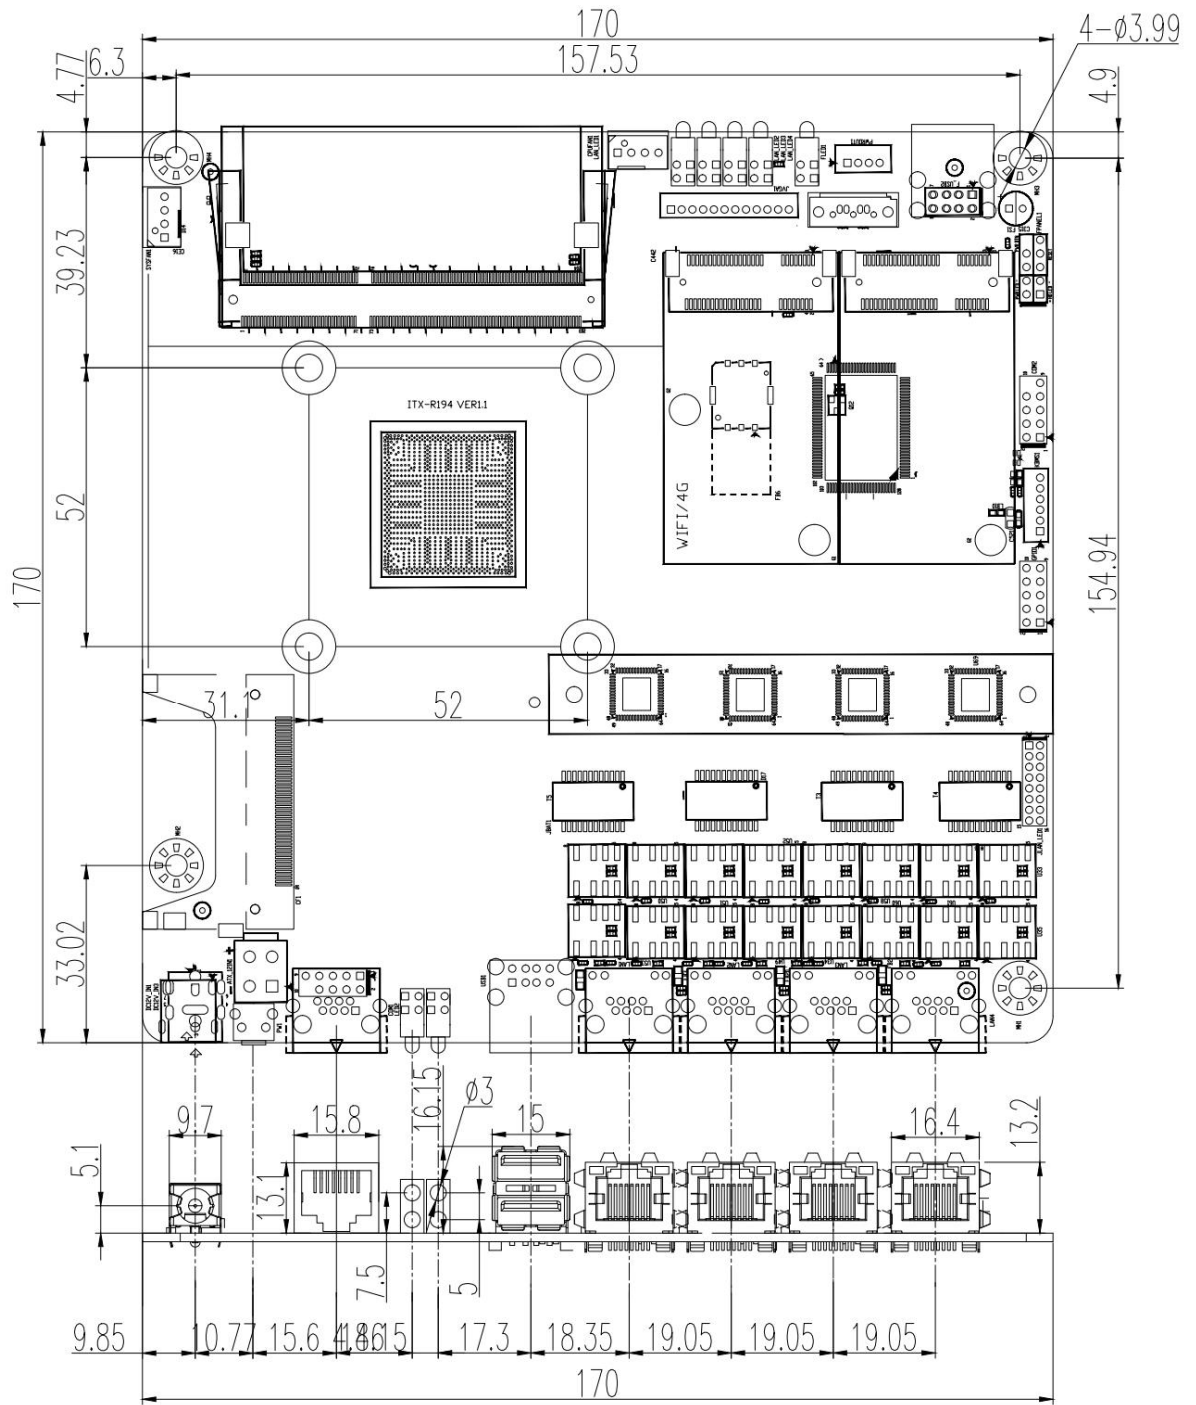

The diagram above shows the I/O interface layout of ITX-R194 VER1.1.

4. Board Installation

Safety Precautions

Before installing the motherboard, please read and follow the safety precautions below:

- Do not remove or damage the serial number label, distributor warranty label, or any other warranty-related labels on the motherboard before installation. Otherwise, it may affect the warranty validation.
- Before installing or removing the motherboard or any other hardware devices, make sure the power is turned off and the power cord is unplugged from the power outlet.
- When installing hardware devices into the motherboard connectors or slots, make sure the connectors are firmly and properly seated.
- When handling the motherboard, avoid touching the metal contacts or circuit areas to prevent short circuits.
- When handling the motherboard, CPU, or memory module, it is recommended to wear an anti-static wrist strap. If an anti-static wrist strap is not available, make sure your hands are dry and touch a grounded metal object first to discharge static electricity.
- Before installation, place the motherboard on an anti-static mat or inside an anti-static bag.
- Before unplugging the power connector from the motherboard, make sure the power supply is turned off.
- Before turning on the power, make sure the power supply voltage is set according to the local voltage standard.
- Before turning on the power, make sure all hardware cables and power cables are correctly connected.
- Do not allow screws to contact the circuits or components on the motherboard, as this may cause damage or malfunction.
- Make sure no screws or metal objects are left on the motherboard or inside the computer chassis.
- Do not place the computer system on an unstable surface.
- Do not place the computer system in a high-temperature environment.
- Turning on the power during installation may cause damage to the motherboard, other devices, or personal injury.
- If you are not familiar with the installation process, or if you encounter any technical problems while using this product, please consult qualified technical personnel.

Memory Installation

This motherboard provides **1 × 204-pin DDR3L SO-DIMM memory slot**.

Before installing the memory module, please note the following:

- 1) Make sure the memory module you purchased is compatible with the specifications supported by this motherboard.
- 2) Before installing or removing the memory module, make sure the computer power is turned off to prevent damage.

- 3) The memory module is designed with a foolproof notch. If the insertion direction is incorrect, the module cannot be inserted. In this case, please change the insertion direction immediately.


Memory Installation Steps:

- 1) Before installing or removing the memory module, turn off the power and unplug the AC power cord.
- 2) Carefully hold the memory module by both edges. Do not touch the metal contacts.
- 3) Align the gold fingers of the memory module with the memory slot. Make sure the notch on the memory module matches the key in the slot.
- 4) Insert the memory module into the slot at an angle of approximately 30 degrees, then gently press it down until you hear a “click” sound. This indicates that the memory module has been properly installed and is ready for use.

Note: Do not apply excessive force when pressing down the memory module to avoid damage.

- 5) To remove the memory module, push the retaining clips on both sides of the DIMM slot outward at the same time, then remove the memory module carefully.

Note: The installation diagram is for reference only.

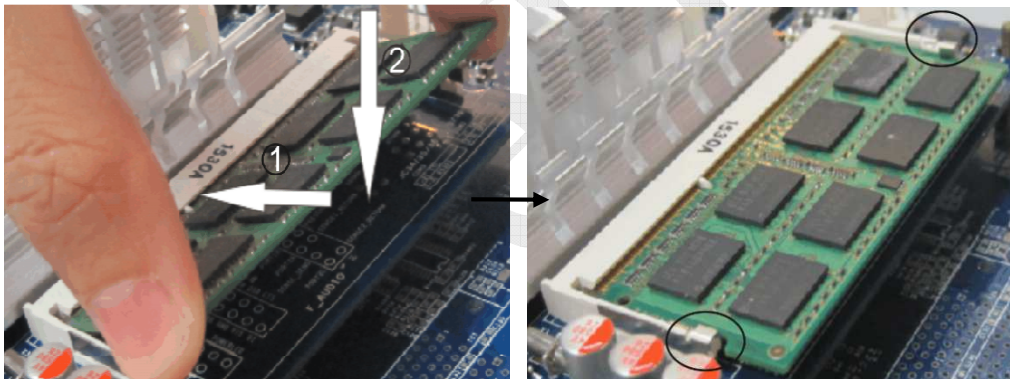


5. Jumper Settings

Jumper Description

For a **2-pin header**, installing a jumper cap on the two pins will close the circuit, creating a short connection.

For a **3-pin header**, the jumper cap can be installed on **Pin 1–2** or **Pin 2–3** to close the corresponding circuit and create a short connection.

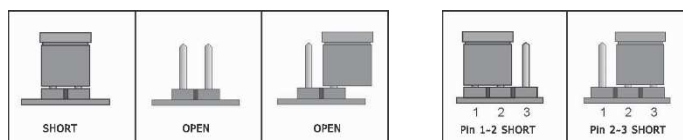

How to Identify Pin 1 of a Jumper?

- 1) Carefully check the motherboard. The pin marked with “1” or indicated by a thick white line is usually Pin 1.
- 2) Check the solder pads on the back side of the motherboard. In most cases, the square solder pad indicates Pin 1.

Clear CMOS Jumper:

The motherboard provides 1 × 1×3-pin Clear CMOS header JBAT1 for clearing or retaining CMOS settings.

Pin pitch: 2.54 mm

The CMOS is powered by the onboard button battery. Clearing the CMOS will permanently erase the previous system configuration and restore the system settings to the default factory values.

To clear the CMOS, follow the steps below:

- 1) Turn off the computer and disconnect the power supply.
- 2) Short Pin 2–3 of JBAT1 for approximately 5 seconds.
- 3) Power on the computer.
- 4) During startup, follow the on-screen prompt to enter BIOS Setup, then load the optimized default settings.
- 5) Save the settings and exit BIOS Setup.

Pin definition is shown below:

JBAT1 Definition:

Function	JBAT1 Setting
Normal operation	Pin 1–2 shorted
Clear CMOS and restore all BIOS settings to factory defaults	Pin 2–3 shorted

AT/ATX Power Mode Jumper

The motherboard provides **1 × 1×3-pin AT-ATX1 jumper** for selecting the power-on mode.

Pin pitch: 2.54 mm

The power-on behavior can be configured by the jumper setting.

AT-ATX1 Definition:

Function	AT-ATX1 Setting
Disable Auto Power-on	1-2Pin
Enable Auto Power-on	2-3Pin

6. Pin Definitions

6.1. The motherboard provides one standard Cisco-style RS-232 serial port.

The COM1 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	RTS	2	DTR
3	TXD	4	GND
5	GND	6	RXD
7	DSR	8	CTS

6.2. The motherboard provides one standard 2 × 5-pin COM header (2.54 mm pitch).

The COM2 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	DCD	2	RXD
3	TXD	4	DTR
5	GND	6	DSR
7	RTS	8	CTS
9	RI	10	NC

6.3. The motherboard provides two onboard USB 2.0 ports through a 2 × 4-pin header (2.54 mm pitch). F_USB2 and USB2 are mutually exclusive.

Note: ITX-R194 supports 4G and one onboard USB 2.0 port by default; Pins 4 and 6 are optional.

The F_USB2 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	+5V	2	+5V
3	Data0-	4	Data1- (optional)
5	Data0+	6	Data1+ (optional)
7	GND	8	GND

6.4. The motherboard provides one onboard 1 × 12-pin JVGA1 connector (2.0 mm pitch).

The JVGA1 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	NC	2	VSYSNC
3	HSYNC	4	GND
5	R	6	GND
7	G	8	GND
9	B	10	GND
11	DDC_SDA	12	DDC_SCL

6.5. The motherboard provides two 1 × 4-pin smart fan connectors. The CPUFAN1 and SYSFAN1 pin definitions are as follows:

Pin	Signal Name
1	GND
2	+12V
3	DET
4	PWM

Note: DET is the fan-speed pulse output; PWM controls the fan speed.

6.6. The motherboard provides one 2 × 5-pin GPIO header (2.54 mm pitch). The GPIO1 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	GND	2	+5V

3	GPO1	4	GPI1
5	GPO2	6	GPI2
7	GPO3	8	GPI3
9	GPO4	10	GPI4

6.7. The motherboard provides one 1 × 4-pin SATA drive power connector (2.0 mm pitch).

The JSPWR1 pin definition is as follows:

Pin	Signal Name
1	+12V
2	GND
3	GND
4	+5V

Be sure to identify Pin 1 of JSPWR1 correctly; incorrect connection may damage the drive. Use only the power cable supplied by CoreIPC.

6.8. The motherboard provides one 1 × 6-pin PS/2 keyboard and mouse connector (2.0 mm pitch). The KBMS1 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	+5V(standby)	2	KB_DT
3	KB_CK	4	MS_DT
5	MS_CK	6	GND

6.9. The motherboard provides one 2 × 8-pin LAN LED header (2.0 mm pitch). The JLAN-LED1 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	LAN1_LED_ACT#	2	+3.3V
3	LAN1_LED_LINK100#	4	LAN1_LED_LINK1G#
5	LAN2_LED_ACT#	6	+3.3V
7	LAN2_LED_LINK100#	8	LAN2_LED_LINK1G#
9	LAN3_LED_ACT#	10	+3.3V
11	LAN3_LED_LINK100#	12	LAN3_LED_LINK1G#
13	LAN4_LED_ACT#	14	+3.3V
15	LAN4_LED_LINK100#	16	LAN4_LED_LINK1G#
17	LAN5_LED_ACT#	18	+3.3V

6.10. The motherboard provides one 2 × 5-pin FPANEL1 header (2.54 mm pitch).

The chassis power switch, reset switch, HDD LED, and power LED can be connected to this header. The FPANEL1 pin definition is as follows:

Pin	Signal Name	Pin	Signal Name
1	HDDLED+	2	PWRLED+
3	HDDLED-	4	PWRLED-
5	GND	6	PWRBTN#
7	RESETBTN#	8	GND
9	NC	10	