



NUC50D User Manual

Issue 1.0

www.CoreIPC.com

Security Guidance

Copyright Statement

© 2026 CoreIPC. All rights reserved.

All trademarks and names mentioned in this user manual are the property of their respective registered companies.

Disclaimer

- This user manual is protected by copyright, and all content herein is the property of CoreIPC.
- CoreIPC reserves the right to modify the product specifications or related information mentioned in this user manual.
- Any modifications or changes to the product specifications or related information mentioned in this user manual will be made without prior notice.
- The contents of this user manual may not be reproduced, modified, reprinted, distributed, or published in any form without prior written permission from CoreIPC.
- To help you use the CoreIPC motherboard, please read the [User Manual] carefully.
- For product-related information, please be sure to read these safety instructions carefully.
- Identifying the Product Version
You can find the version of this motherboard labeled [Issue:X.X] on the motherboard itself. X.X represents a number; for example, a label reading [Issue1.0] indicates that the version of this motherboard is 1.0. Please note the product version when updating the motherboard's BIOS or drivers, or when referring to other technical documentation.

Basic Safety Tips

1. Before using this product, please be sure to read the product manual carefully.
2. Any cards not yet ready for installation should be stored in anti-static bags.
3. Before removing the board from the antistatic bag, place your hand on a grounded metal object for a moment (such as 10 seconds) to discharge any static electricity from your body and hands.
4. When handling circuit boards, you must wear anti-static gloves and make it a habit to touch only the edges.
5. To prevent electric shock or damage to the product, be sure to turn off the AC power before inserting, removing, or reconfiguring the board.
6. Before moving a board or the entire unit, you must first turn off the AC power.
7. For complete systems, be sure to turn off the AC power before adding or removing any boards.
8. Before connecting or disconnecting any device, you must first turn off the AC power.
9. To avoid unnecessary damage to the product caused by frequent power cycles, wait at least 30 seconds after turning it off before turning it back on.

Ordering Information

No.	Model	CPU	Cores	Freq.	Memory	HDMI	VGA	LAN	USB	COM/485	POWER
1	NUC50D-N22-N5095 VER1.0	N5095	4	2.0G	1*DDR4	1	1	2	8	2/ 2	12V

CorelPC


1. Product Description

NUC50D is a CoreIPC NANO-series multi-LAN motherboard supporting the full range of Intel® Jasper Lake processors. It is suitable for software routers, network security, industrial control, cloud terminals, and other applications.

The main features of the NUC50D motherboard are as follows:

- Integrated Intel® Celeron® N5095 2.0 GHz quad-core processor; compatible with the full range of Intel® Jasper Lake processors;
- 1 × SO-DIMM slot supporting single-channel DDR4-2933 memory, up to 32 GB;
- Display outputs support VGA or DisplayPort and HDMI;
- Supports 2 × Realtek Gigabit Ethernet ports; a single-LAN configuration is optional;
- Supports 1 × M.2 Key M storage interface with automatic SATA/PCIe adaptation;
- Supports 1 × Mini PCIe interface for Wi-Fi or 4G modules;
- Supports 8 × USB ports;
- Supports 2 × RS-232 serial ports and 2 × RS-485 ports by default; optional configurations support 4 × RS-232 ports or 1 × RS-422 port;
- Supports AT/ATX power-mode switching and 12 V DC power input.


2. Motherboard Block Diagram

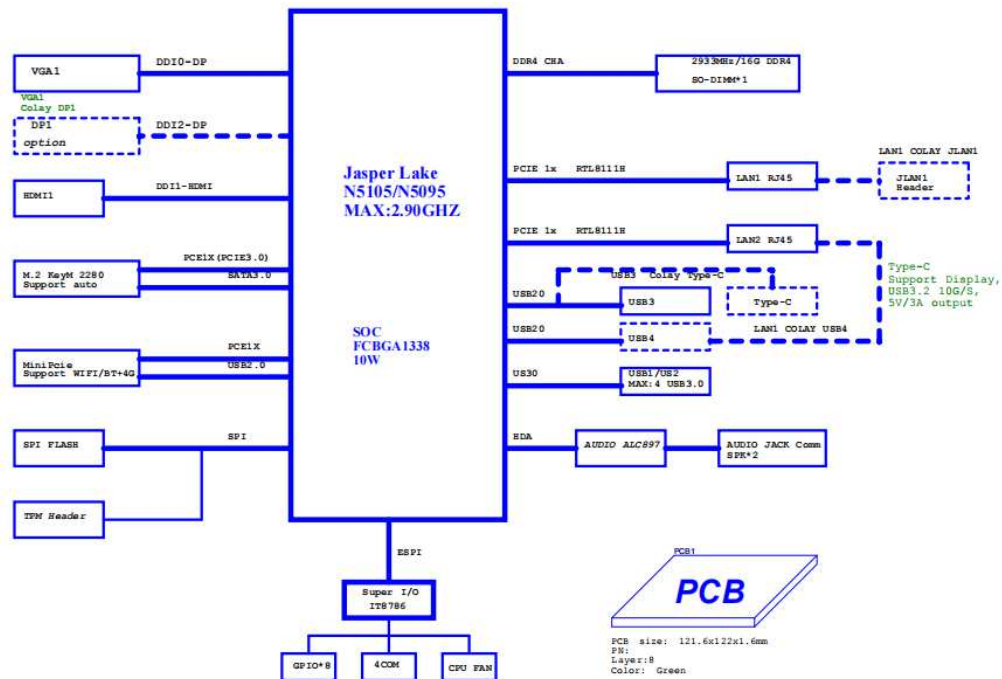

3. Motherboard Specifications

Item	Description
Processor	Integrated Intel® Celeron® N5095 2.0 GHz quad-core processor, TDP 15 W; compatible with the full range of Intel® Jasper Lake processors
Memory	1 × SO-DIMM slot; supports single-channel DDR4-2933 memory, up to 32 GB
Display	Integrated Intel® UHD Graphics 600
	1 × VGA or DisplayPort interface (VGA extension header reserved for customization; DisplayPort supports 4K at 60 Hz), and 1 × HDMI 2.0 port supporting 4K at 60 Hz
	Supports synchronous or asynchronous display through VGA or DisplayPort and HDMI
Network	2 × Realtek RTL8111H Gigabit Ethernet controllers (single-LAN configuration optional), supporting Wake-on-LAN and PXE boot
Storage	1 × 7-pin SATA 3.0 storage connector with transfer rates up to 6 Gbps
	1 × M.2 Key M 2280 slot with automatic PCIe/SATA SSD adaptation
Audio	Onboard ALC897 7.1-channel HD audio controller supporting MIC/Line-out and a dual-channel 5 W amplifier for 2-ohm speakers
Expansion Slot	1 × Mini PCIe slot supporting Wi-Fi and 4G modules
Front I/O Ports	1 × HDMI display port
	1 × VGA display port, mutually exclusive with the 4K 60 Hz DisplayPort option; VGA is populated by default
	2 × USB 2.0 ports; an optional USB Type-C interface is available, with standard USB ports populated by default
	2 × RJ-45 Gigabit Ethernet ports; LAN2 and the USB 2.0 interface are mutually exclusive
	1 × 12 V DC power input connector
Rear I/O Ports	1 × 3.5 mm audio jack supporting both Line-out and MIC-in
	2 × RS-232 serial ports (DB9)
	4 × USB 3.0 ports
	1 × illuminated power button
	1 × HDD activity LED
	1 × Clear CMOS button
Onboard I/O Headers	2 × COM headers, not populated by default; optional support for 4 × RS-232 ports, with optional RS-422 support on COM2
	1 × 1 × 4-pin amplifier header
	1 × USB 2.0 header for 2 additional USB 2.0 ports; signals are shared with LAN2
	1 × 2 × 5-pin GPIO header
	1 × 1 × 4-pin drive power connector
	1 × 4-pin ATX power connector

	1 × 2 × 5-pin front-panel switch and LED header
Security	1 × 2 × 6-pin TPM 2.0 header; footprint reserved for an onboard TPM
Operating Temperature	-10°C~60°C
Storage Temperature	-20°C~70°C
Operating Humidity	5%–95% relative humidity, non-condensing
Dimensions	120mm x 120mm

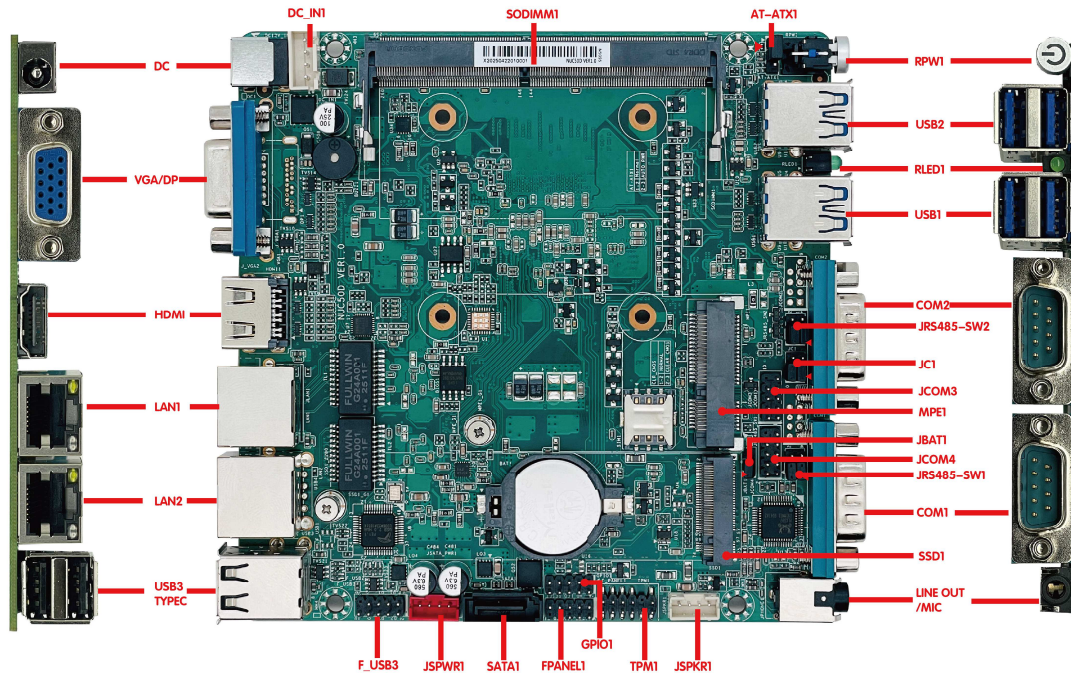

Note: The image above shows the front view of NUC50D VER1.0. Images of other models may differ.
The image can be enlarged for viewing. Pin 1 of each header is marked with a red triangle.

4. Board Installation

Safety Precautions:

Before installing the motherboard, please read and follow the safety precautions below:

- Do not remove or damage the serial number label, distributor warranty label, or any other warranty-related labels on the motherboard before installation. Otherwise, it may affect the warranty validation.
- Before installing or removing the motherboard or any other hardware devices, make sure the power is turned off and the power cord is unplugged from the power outlet.
- When installing hardware devices into the motherboard connectors or slots, make sure the connectors are firmly and properly seated.
- When handling the motherboard, avoid touching the metal contacts or circuit areas to prevent short circuits.
- When handling the motherboard, CPU, or memory module, it is recommended to wear an anti-static wrist strap. If an anti-static wrist strap is not available, make sure your hands are dry and touch a grounded metal object first to discharge static electricity.
- Before installation, place the motherboard on an anti-static mat or inside an anti-static bag.
- Before unplugging the power connector from the motherboard, make sure the power supply is turned off.
- Before turning on the power, make sure the power supply voltage is set according to the local voltage standard.
- Before turning on the power, make sure all hardware cables and power cables are correctly connected.
- Do not allow screws to contact the circuits or components on the motherboard, as this may cause damage or malfunction.
- Make sure no screws or metal objects are left on the motherboard or inside the computer chassis.
- Do not place the computer system on an unstable surface.
- Do not place the computer system in a high-temperature environment.
- Turning on the power during installation may cause damage to the motherboard, other devices, or personal injury.
- If you are not familiar with the installation process, or if you encounter any technical problems while using this product, please consult qualified technical personnel.

Memory Installation

This motherboard provides **1 × 260-pin DDR4 SO-DIMM memory slot**.

Before installing the memory module, please note the following:

- 1) Make sure the memory module you purchased is compatible with the specifications supported by this motherboard.
- 2) Before installing or removing the memory module, make sure the computer power is turned off to prevent damage.

- 3) The memory module is designed with a foolproof notch. If the insertion direction is incorrect, the module cannot be inserted. In this case, please change the insertion direction immediately.


Memory Installation Steps:

- 1) Before installing or removing the memory module, turn off the power and unplug the AC power cord.
- 2) Carefully hold the memory module by both edges. Do not touch the metal contacts.
- 3) Align the gold fingers of the memory module with the memory slot. Make sure the notch on the memory module matches the key in the slot.
- 4) Insert the memory module into the slot at an angle of approximately 30 degrees, then gently press it down until you hear a “click” sound. This indicates that the memory module has been properly installed and is ready for use.

Note: Do not apply excessive force when pressing down the memory module to avoid damage.

- 5) To remove the memory module, push the retaining clips on both sides of the DIMM slot outward at the same time, then remove the memory module carefully.


Note: The installation diagram is for reference only.

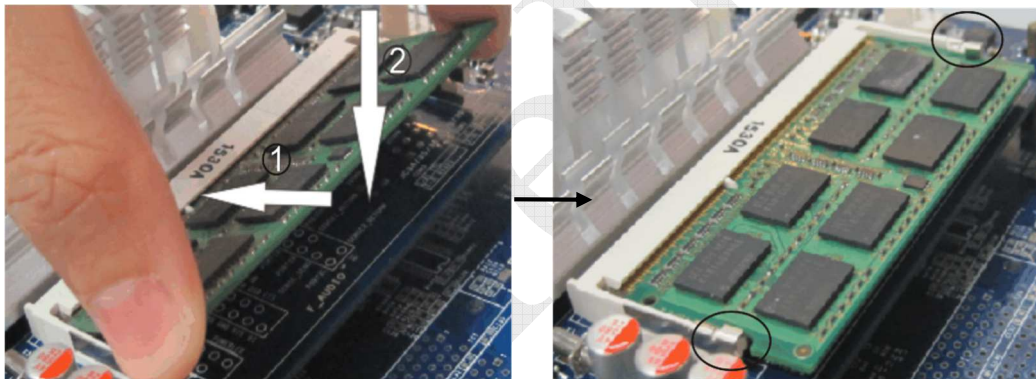

5. Jumper Settings

Jumper Description

For a 2-pin header, installing a jumper cap across both pins closes the circuit (shorts the pins). For a 3-pin header, install the jumper cap on Pins 1–2 or Pins 2–3 to close the corresponding circuit.

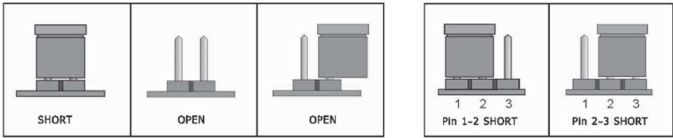

How to Identify Pin 1 of a Jumper?

- 1) Carefully inspect the motherboard. A pin marked “1” or indicated by a thick white line is Pin 1.
- 2) Check the solder pads on the back of the motherboard. The square pad usually indicates Pin 1.

Clear CMOS Jumper:

The motherboard provides 1 × 1×3-pin Clear CMOS header JBAT1 for clearing or retaining CMOS settings.

Pin pitch: 2.0 mm

The CMOS is powered by the onboard button battery. Clearing the CMOS will permanently erase the previous system configuration and restore the system settings to the default factory values.

To clear the CMOS, follow the steps below:

- 1) Turn off the computer and disconnect the power supply.
- 2) Short Pin 2–3 of JBAT1 for approximately 5 seconds.
- 3) Power on the computer.
- 4) During startup, follow the on-screen prompt to enter BIOS Setup, then load the optimized default settings.
- 5) Save the settings and exit BIOS Setup.

Pin definition is shown below:

JBAT1 Definition:

Function	JBAT1 Setting
Normal operation	1-2Pin
Clear CMOS and restore all BIOS settings to factory defaults	2-3Pin

AT/ATX Power Mode Jumper

The motherboard provides **1 × 1×3-pin AT-ATX1 jumper** for selecting the power-on mode.

Pin pitch: 2.54 mm

The power-on behavior can be configured by the jumper setting.

AT-ATX1 Definition:

Function	AT-ATX1 Setting
Disable Auto Power-on	Pins 1–2 (default)
Enable Auto Power-on	2-3Pin

6. Pin Definitions

6.1. The motherboard supports up to 4 serial ports (2 standard DB9 serial ports by default) and provides 4 × 2 × 5-pin standard COM headers with a 2.0 mm pitch. COM1 and COM2 support RS-232 or RS-485 through jumper settings. The standard pin definitions for JCOM1, JCOM2, JCOM3, and JCOM4 are as follows:

(For 4 × RS-232 ports or RS-422 support on COM2, contact the sales team before ordering to specify the customization requirements.)

PIN	Signal Name	PIN	Signal Name
1	DCD (A)	2	RXD (B)
3	TXD	4	DTR
5	GND	6	DSR
7	RTS	8	CTS
9	RI	10	NC

JCOM1 and COM1 share the same signals and are mutually exclusive. JCOM2 and COM2 also share the same signals and are mutually exclusive. JCOM1 and JCOM2 are not populated by default. Supporting 4 serial ports requires a hardware modification; contact our sales team in advance.

6.2. COM1 and COM2 support RS-232 by default. RS-485 can be enabled through jumper settings, and COM2 can optionally support RS-422. The jumper settings are as follows:

Interface	Function	JRS485_SW1 Setting	JC1 Setting	Definition
COM1	RS232	1-3Pin ,2-4Pin (default)	1-3Pin (default)	COM1 Pin 2: RXD COM1 Pin 3: TXD
	RS485	3-5Pin ,4-6Pin	3-5Pin	COM1 Pin 1: A COM1 Pin 2: B

Interface	Function	JRS485_SW2 Setting	JC1 Setting	Definition
COM2	RS232	1-3Pin ,2-4Pin (default)	2-4Pin (default)	COM2 Pin 2: RXD COM2 Pin 3: TXD
	RS485	3-5Pin ,4-6Pin	4-6Pin	COM2 Pin 1: A COM2 Pin 2: B

Interface	Function	JRS485_SW2 Setting	JC1 Setting	Definition
COM2	RS422	3-5Pin ,4-6Pin	4-6Pin	COM2 Pin 1: TX+ COM2 Pin 2: TX- COM2 Pin 3: RX+ COM2 Pin 4: RX-

6.3. The motherboard provides 1 × 1 × 4-pin amplifier header with a 2.0 mm pitch. The JSPKR1 pin definition is as follows:

PIN	Signal Name
1	SPKL-
2	SPKL+
3	SPKR-
4	SPKR+

6.4. The motherboard provides 1 × 2 × 5-pin FPANEL1 header with a 2.0 mm pitch.

The chassis power switch, reset switch, HDD LED, and power LED can be connected to this

header. The FPANEL1 pin definition is as follows:

PIN	Signal Name	PIN	Signal Name
1	HDDLED+	2	PWRLED+
3	HDDLED-	4	PWRLED-
5	GND	6	PWRBTN#
7	RESETBTN#	8	GND
9	NC	10	

6.5. The motherboard provides 1 × 1 × 4-pin fan header (optional). The CPUFAN1 pin definition is as follows:

PIN	Signal Name	PIN	Signal Name
1	GND	2	+12V
3	DET	4	PWM

Note: DET is the fan-speed pulse output; PWM is the fan-speed PWM control signal.

6.6. The motherboard provides 1 × 2 × 6-pin TPM 2.0 header. The TPM1 pin definition is as follows:

PIN	Signal Name	PIN	Signal Name
1	SPI POWER	2	SPI CS#
3	SPI MISO	4	SPI MOSI
5	NC	6	SPI CLK
7	GND	8	SPI RESET
9	NC		
11	NC	12	SPI IRQ

6.7. The motherboard provides 1 × 2 × 5-pin GPIO header with a 2.0 mm pitch. The GPIO1 pin definition is as follows:

PIN	Signal Name	PIN	Signal Name
1	GND	2	+5V
3	GPO1	4	GPI1
5	GPO2	6	GPI2
7	GPO3	8	GPI3
9	GPO4	10	GPI4

6.8. The motherboard provides 1 × red 1 × 4-pin SATA drive power connector with a 2.0 mm pitch.

The JSATA_PWR1 pin definition is as follows:

PIN	Signal Name
1	+12V
2	GND
3	GND
4	+5V

Make sure the location of Pin 1 on JSPWR1 is correct; an incorrect connection may damage the drive. Use only the power cable supplied by CoreIPC.

6.9. The motherboard provides 1 × 1 × 4-pin DC power connector. The DC_IN1 pin definition is as follows:

PIN	Signal Name
-----	-------------

1	+12V
2	+12V
3	GND
4	GND

6.10. The motherboard provides 1 × 2 × 5-pin USB 2.0 header with a 2.0 mm pitch. The F_USB3 pin definition is as follows:

PIN	Signal Name	PIN	Signal Name
1	+5V	2	+5V
3	Data0-	4	Data1-
5	Data0+	6	Data1+
7	GND	8	GND
9		10	GND